




TIG TORCH COOLING SYSTEM

SPECIFICATIONS:

- Factory set at 50 psi
- 2 gallon reservoir
- 115 or 230vac / single phase- 50/60 hz
- 3.2 / 1.5 amp : 60 Hz
- 10,000 BTU
- Dimensions: 12"L x 14W x 9"H
- 1/4" Female Pipe Fitting (water in/out) with 5/8 LH Std. Inert Gas Fitting
- 8 foot power cord
- Visible water level through tank
- Thermal overload
- Net weight: 30 lbs / 13.6 kg
- Foam packed for UPS shipment

*Tech Sheet & Parts List / Diagram
(as shown) included with unit.*

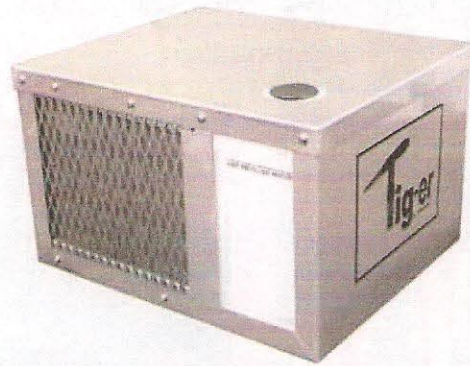

The **TIG-er Cooling System** is designed for:

| Equipment | UP TO |
|-------------|----------|
| TIG torches | 250 amps |
| MIG guns | 250 amps |

- Plastic Water Tank eliminates coolant contamination due to electrolysis or chemical reactions.
- All units are plumbed with copper tubing and reinforced hose.
- New extended life pump features a direct drive power system reducing maintenance and vibration.
- No external plumbing is required because of closed loop water system.
- Self Priming Pump
- Easy Change Pump
- Strong rigid construction designed to support power unit.
- Compact Design

15 Month Limited Warranty

Defense Anti-Freeze and Pump Lubricant (DF929 / DF927 Ready to Use) provides year round protection for DYNAFLUX water coolers and other closed loop water recirculators.

NOTE: Use of automotive anti-freeze compounds voids warranty and shortens pump life.